

12

11

10

9

8

7

6




5

4

3

2

1

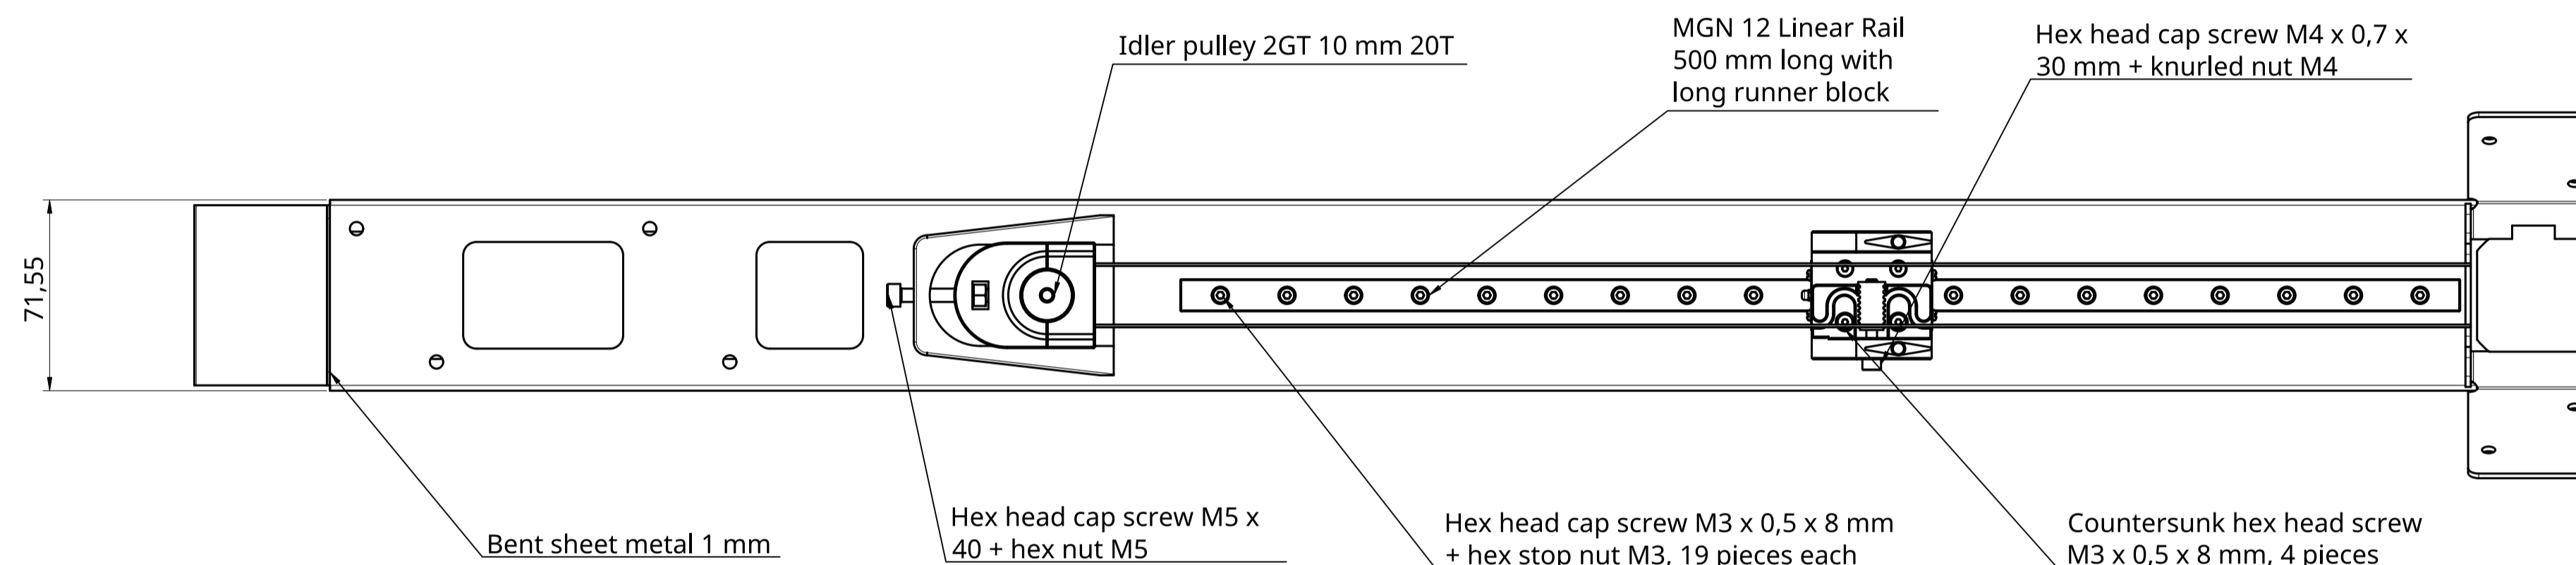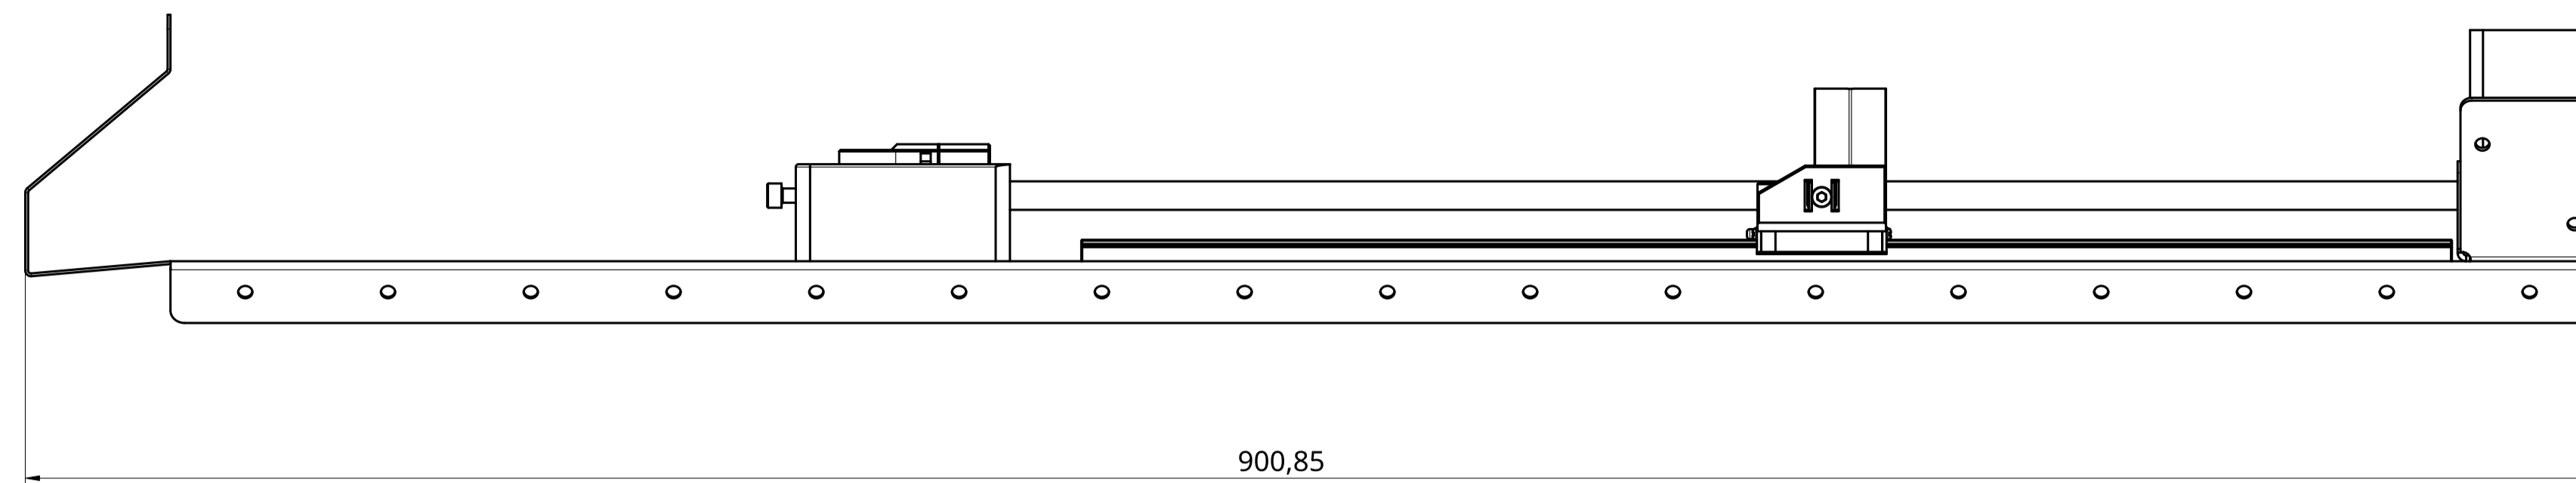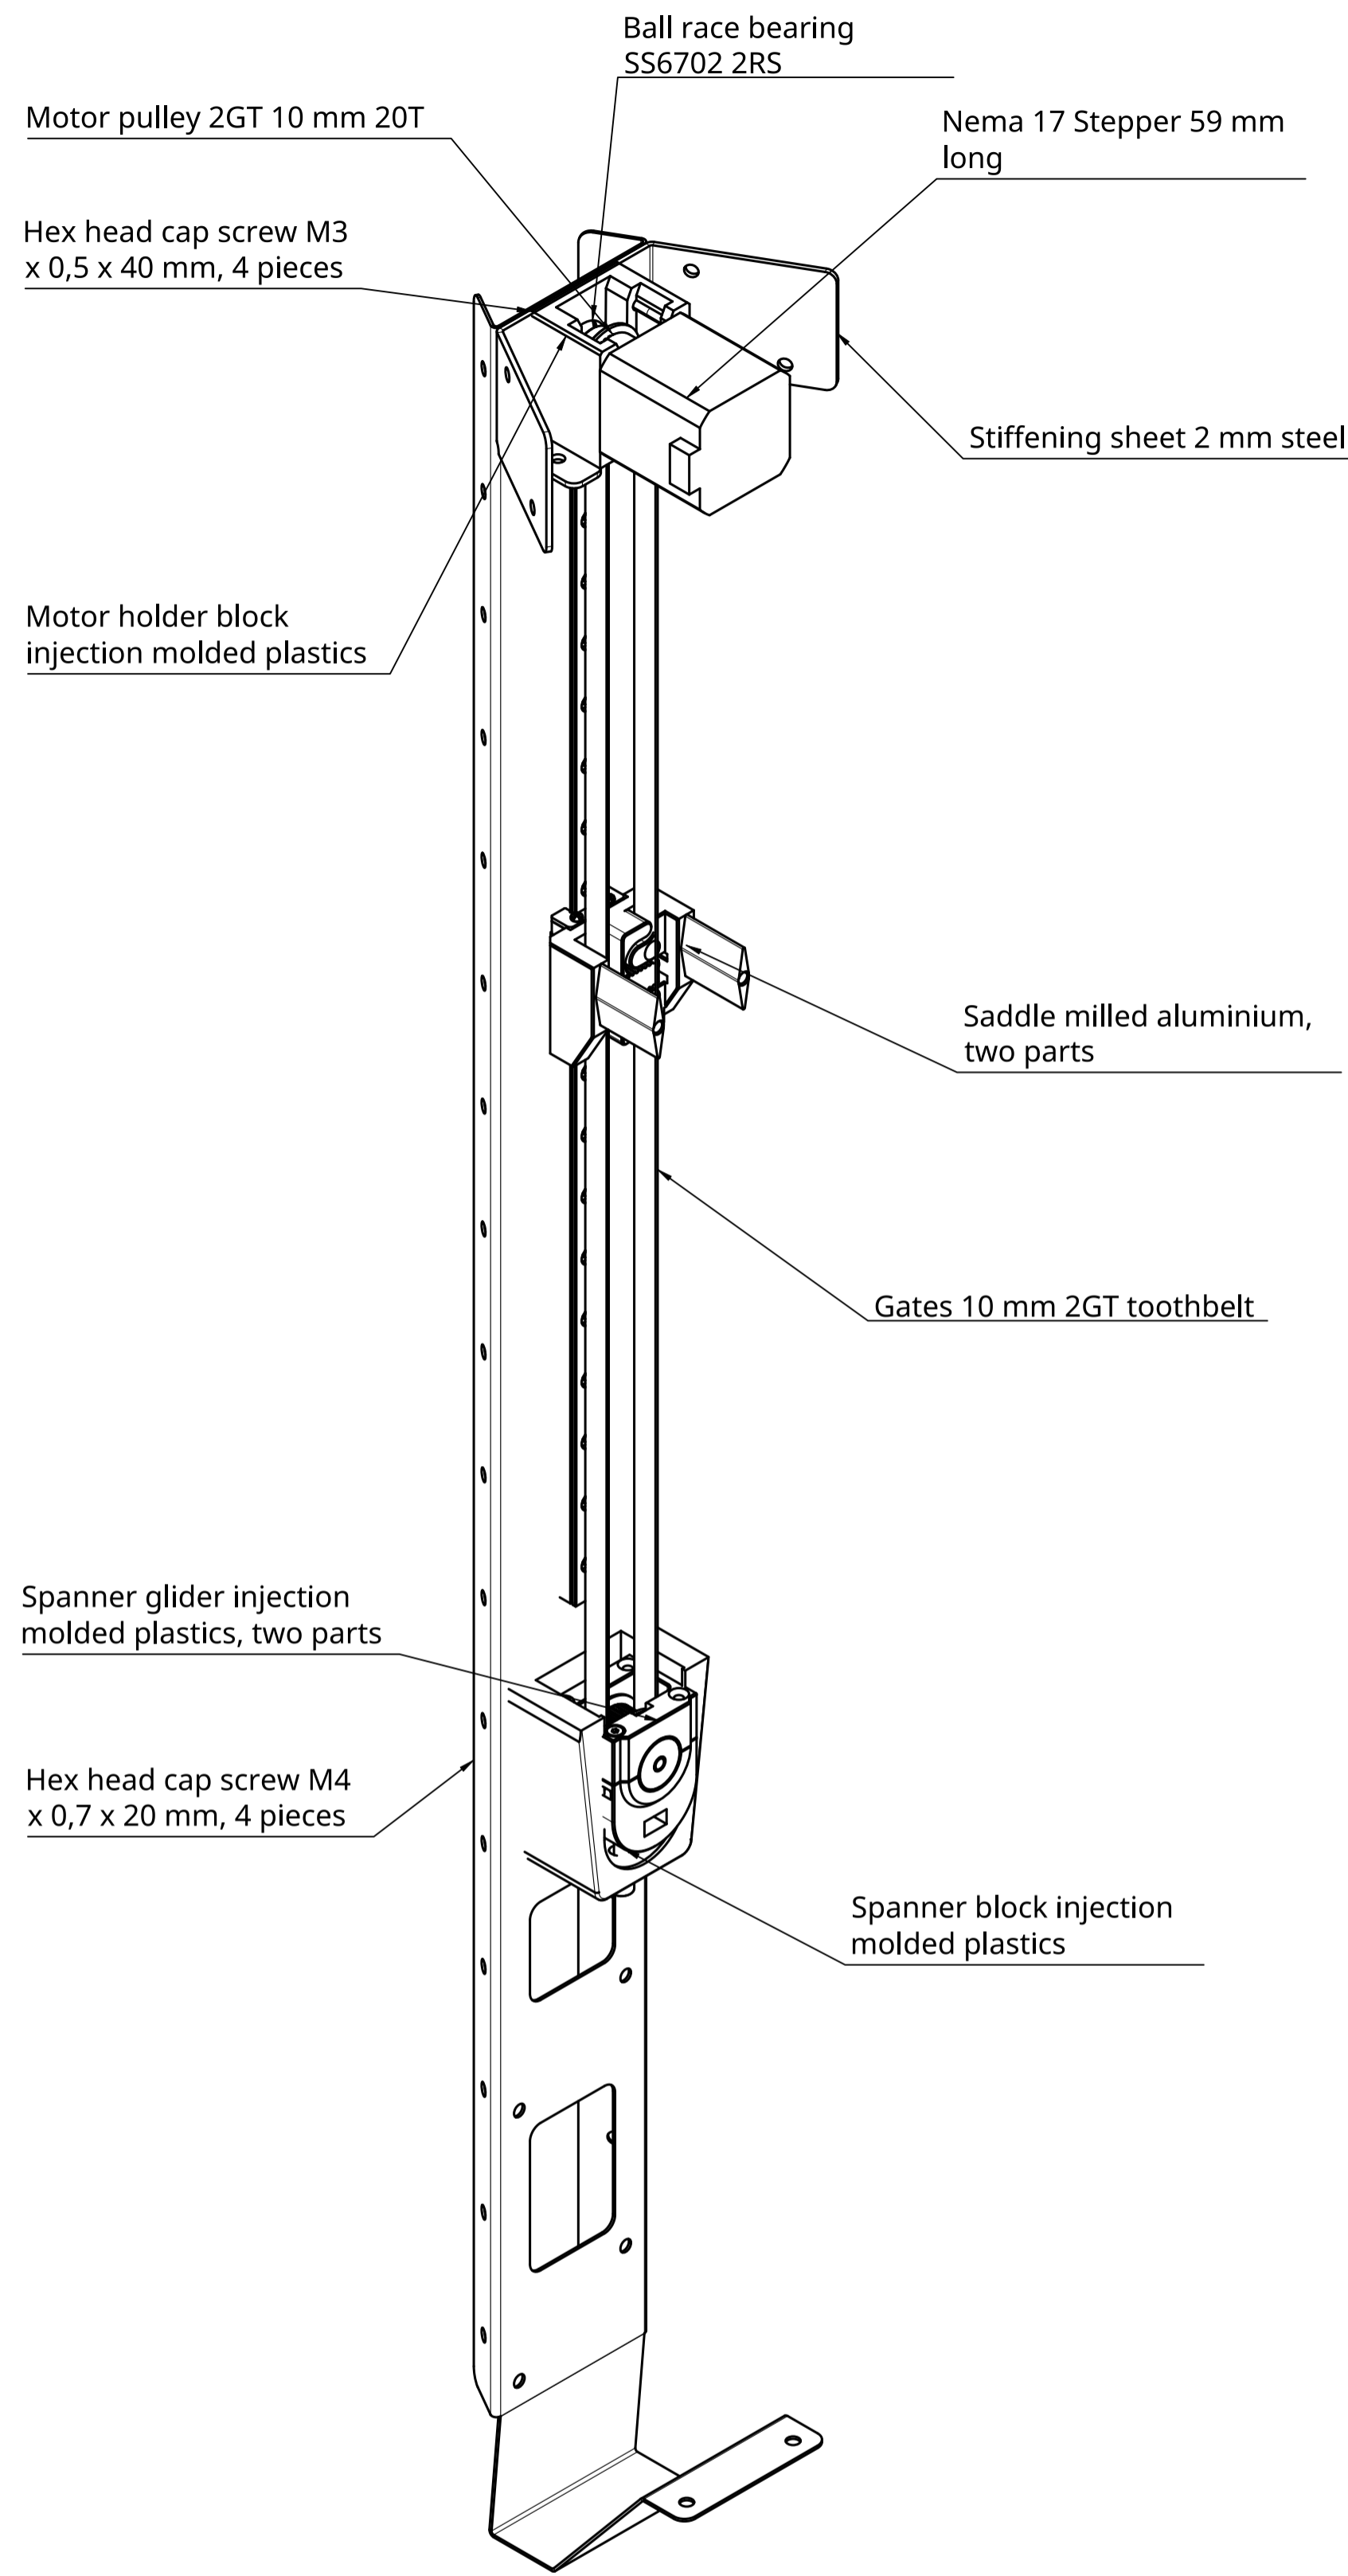

| Item | Quantity | Part number | Description |
|------|----------|-------------|---|
| 1 | 1 | 1 | CPC MGN 12 Linear Rail |
| 2 | 1 | 2 | Motor Holder |
| 3 | 1 | 3 | Spanner Block |
| 4 | 1 | 4 | Spanner Glider Part 1 |
| 5 | 1 | 5 | Stepper NEMA17, 58 mm |
| 6 | 1 | 6 | Bearing SS6702 2RS |
| 7 | 2 | 7 | Motor Pulley 2GT 20T |
| 8 | 1 | 8 | Spanner Glider Part 2 |
| 9 | 1 | 9 | Axis 5 mm Steel Rod |
| 10 | 2 | 10 | Bearing 635Z |
| 11 | 1 | 11 | Gates 2GT 10 mm toothed Belt |
| 12 | 1 | 12 | Sheet Metal Frame Part |
| 13 | 1 | 13 | Sheet Metal Structural Reinforcement |
| 14 | 1 | 14 | CPC MGN 12 L Carriage |
| 15 | 1 | 15 | Saddle |
| 16 | 1 | 16 | Belt Clamp |
| 17 | 1 | 17 | Hex socket head cap screw M4x0.70 x 30 Stainless Steel |
| 18 | 4 | 18 | Hex socket countersunk head screw M3x0.5 x 8 Stainless Steel |
| 19 | 19 | 19 | Hex socket head cap screw M3x0.50 x 8 Stainless Steel |
| 20 | 19 | 20 | Hex nut grade A & B M3x0.5 Stainless Steel |
| 21 | 4 | 21 | Hex socket head cap screw M3x0.50 x 40 x 18 Stainless Steel |
| 22 | 1 | 22 | Hex socket countersunk head screw M3x0.5 x 25 Stainless Steel |
| 23 | 4 | 23 | Hex socket head cap screw M4x0.70 x 20 Stainless Steel |
| 24 | 1 | 24 | Hex socket head cap screw M5x0.80 x 40 Stainless Steel |
| 25 | 1 | 25 | Hex nut grade A & B M5x0.8 Stainless Steel |

UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN MILLIMETERS

ANGULAR = ± °

SURFACE FINISH

DO NOT SCALE DRAWING

BREAK ALL SHARP EDGES AND REMOVE BURRS

FIRST ANGLE PROJECTION

| NAME | SIGNATURE | DATE |
|----------|----------------|------------|
| DRAWN | CHRISTIAN MAYR | 2022-06-01 |
| CHECKED | | |
| APPROVED | | |

| | | | |
|-------|-----|-----------------------|----|
| TITLE | | Modulachse DeltaS_V04 | |
| SIZE | A1 | DWG NO. | 01 |
| SCALE | 1:2 | WEIGHT | |
| SHEET | | 1 of 1 | |

12

11

10

9

8

7

6

5

4

3

2

1